



Xingsanxing Cloud Technology Co., Ltd. is a diversified innovative technology enterprise integrating facade, doors and windows and smart door control hardware and technical consultation. In-depth exploration of the future development trend of architectural hardware is to create a quality living art space.

Xingsanxing hardware takes "manufacturing high-quality goods and serving the world" as its philosophy, and "Do the top hardware striving for the century-old brand" as its vision. Xingsanxing covers over 150,000 square meters with 2,000 employees, an experienced management team, an innovative technical team and a vigorous production team. Nowadays, There is a large number of China and foreign patents and craftsmanship manufacturing data analysis and management systems. With the introduction of advanced automatic coating lines, automatic assembly line, intelligent robot, large-scale die casting production lines and other high-end equipment, we provide customers with high-quality innovative products, and maintain long-term strategic cooperation with many world-renowned developers.



Focusing on the concepts of safety, energy-saving and eco-friendly in the WINDOOR FACADE industry, Xingsanxing will continue to innovate based on human-centered design, meeting users' pursuit for quality of life, and make the building space and the environment harmonious integration.



Windows and DOOR Hardware

ALUMINUM ALLOY DOORS AND
WINDOWS CURTAIN WALL HARDWARE
ACCESSORIES




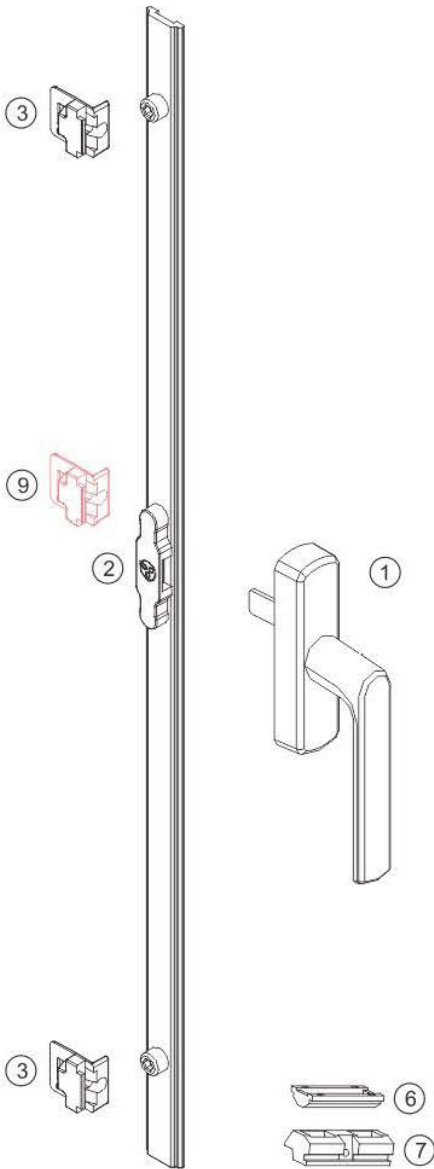


No.	Item Name	Code	Quantity	Mark
1	Handle	SZ64B	1	handles have varies type available
2	Aluminum rod	CDG08	1	
3	Lock catch	SK03A	2	
4	Hinge	SH64	2	
5	European limit	FCC	1	
6	Ascending block	H20A	1	
7	Lock base	HK20	1	

Configuration instructions:

- 1.The configuration applies to the European standard open 20-slot profile;
- 2.The customer chooses a handle according to his or her own preferences.
- 3.The load-bearing performance of the hinge is related to the size of the sash and the design of the profile.
4. Color accessories for the selection of accessories.
- 5.It is recommended to use the FCC European limit bracket to achieve better opening effect and improve the service life of the window.

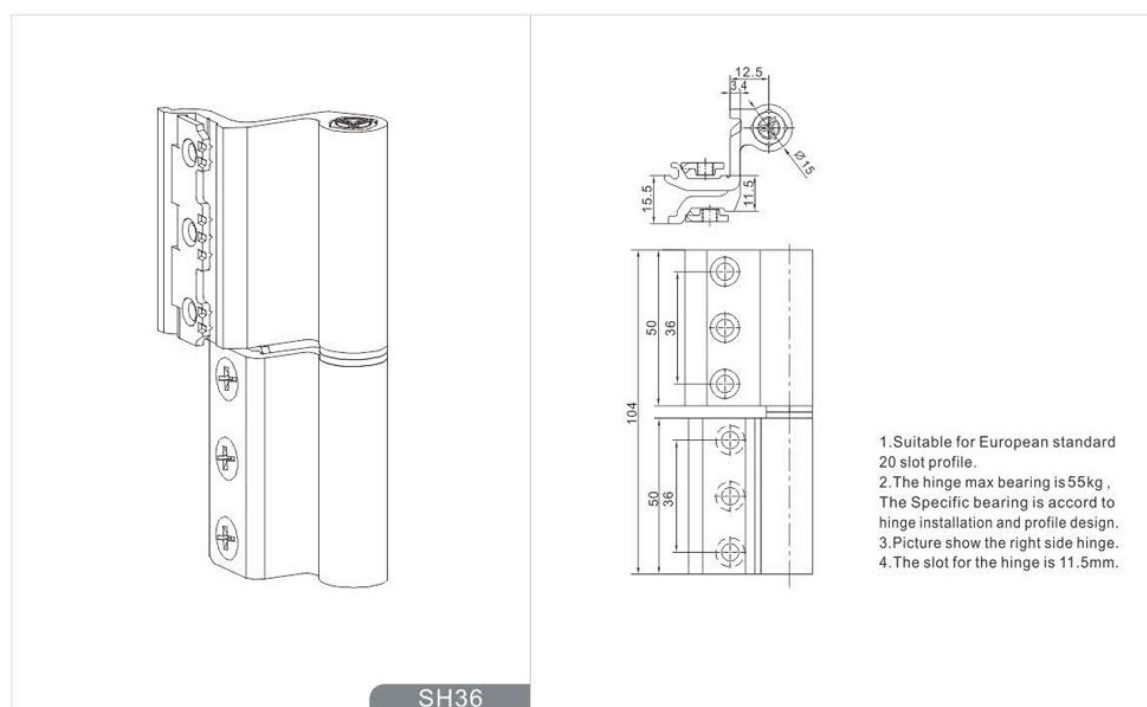

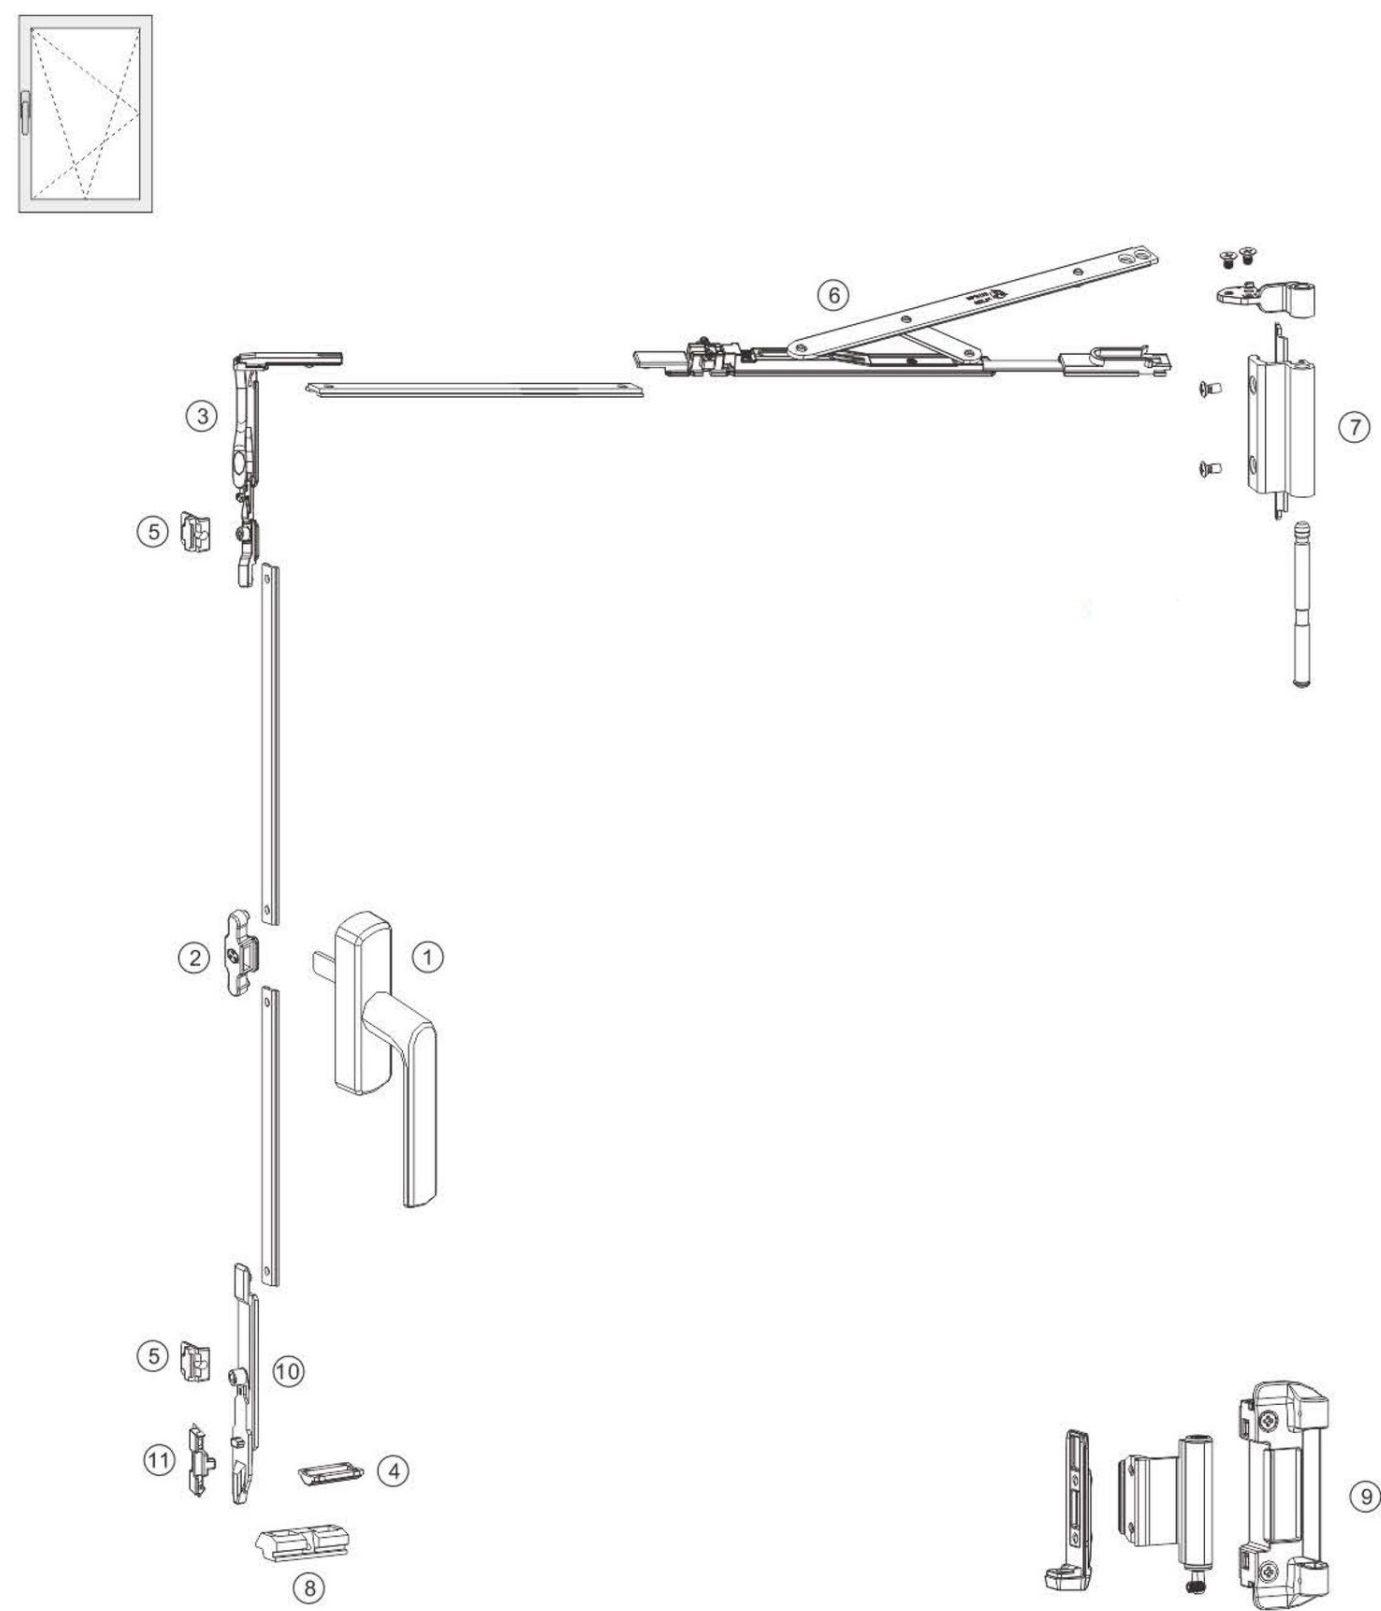


No.	Item Name	Code	Quantity	Mark
1	Handle	SZ64B	1	Handles have varies type available
2	Converter	SN15	1	
3	Corner device	JD05A	1	
4	Ascending block	H20A	1	
5	Lock catch	SK03A	2	
6	Big compass	KDL03A	1	
7	Upper hinge system	KDSH03	1	
8	Lock base	ZHK20	1	
9	Lower hinge system	KDSH04A	1	
10	Flip support	KDSCA	1	
11	Disengagement preventer	KDFT	1	

Configuration instruction :

- 1.Window sash slot width dimension between 390-650mm can use KDL04 Mini compass , , window sash slot width dimension between 460- 900 mm, can use KDL03A big compass .window sash slot width dimension between 330-430mm, can use KDL04A mini compass.
- 2.This product is suitable for the European standard 20 slot aluminum profiles.
- 3.The maximum allowable weight is 90 kg.



European standard energy-saving door one fan of tilt and turn multi-point locking M100 system series

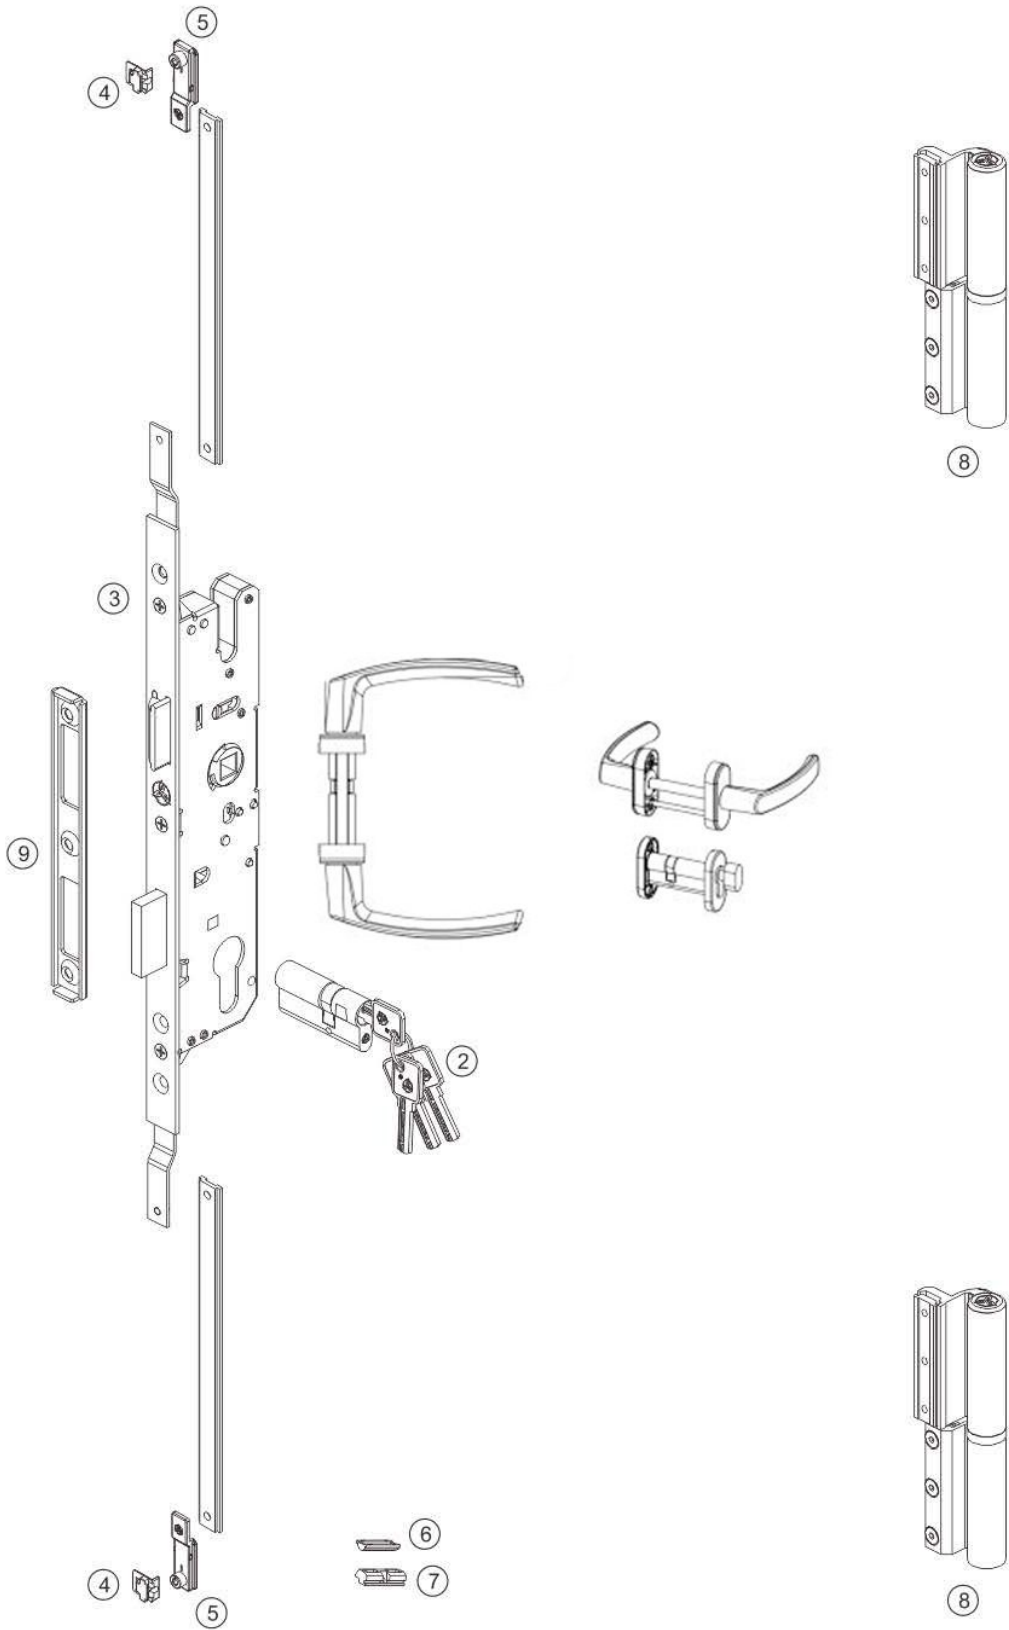


No.	Item Name	Code	Quantity	Mark
1	Handle	PJ102N 80138	1	Handles have varies type available
2	Cylinder	SMZX	1	according to profile
3	Lock body	885	1	
4	Lock catch	SK03A	2	
5	Lock nail block	SC03A	2	
6	Ascending block	H20A	1	
7	Lock base	HK20	1	
8	Hinge	SH43B	2	
9		SMK05B	1	

Configuration instructions:




- 1.Commonly used in the European standard 20 slot inward opening door.
- 2.Single door best size is 900mmX2200mm.
- 3.The load-bearing performance of the hinge is related to the size of the sash and the design of the profile
- 4.Before install the hinge , put the hinge plate into the profile first.
- 5.Colors are show the available parts for choose , together with the European limit support is better.

Multi-point lock body opening

- 1.According to the profile to choose the lock body.
- 2.Cylinder is according to the profile and customer's.
- 3.Screws and rod is according to the profile 's thickness and type of handle .
- 4.Turn the handle to make the open and close performance.

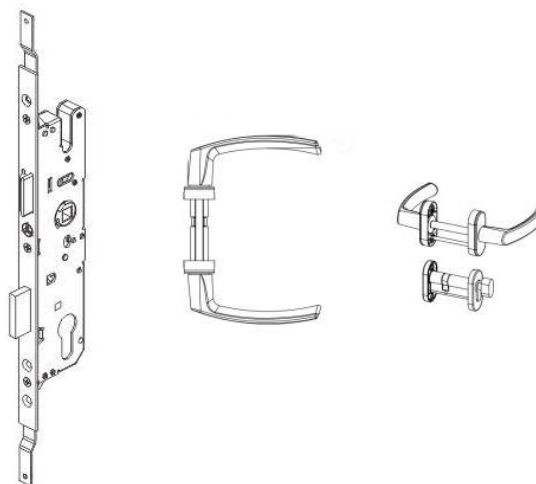

European standard energy-saving door one fan of tilt and turn multi-point locking M100 system series

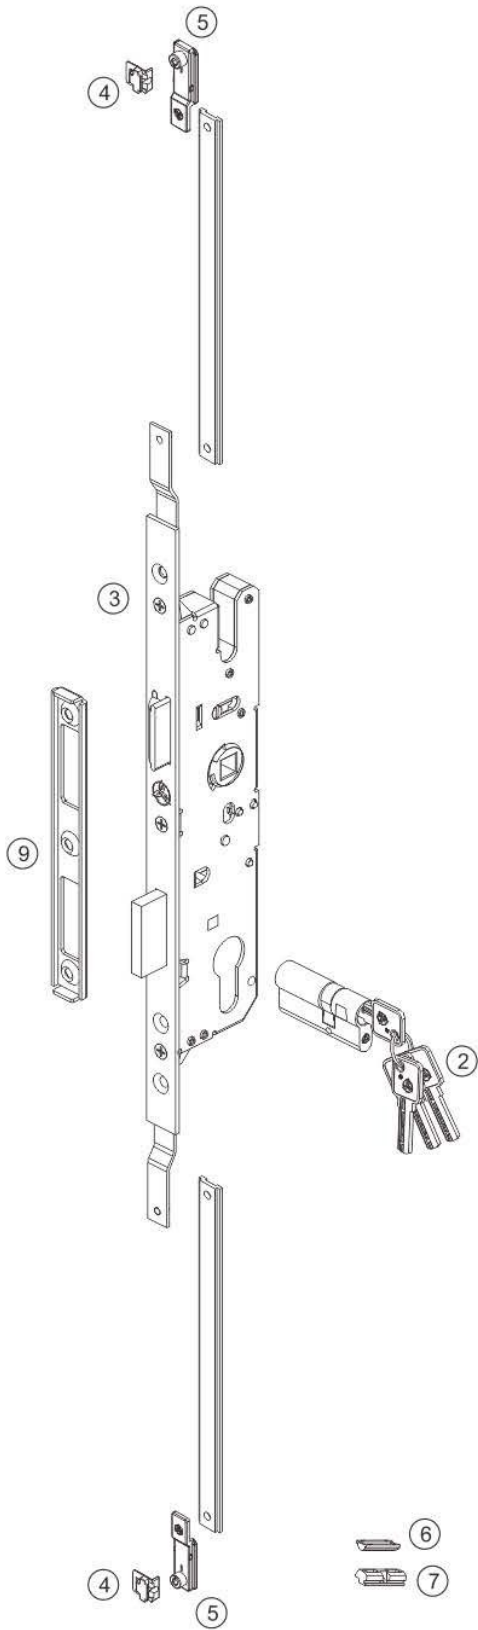


No.	Item Name	Code	Quantity	Mark
1	Handle	PJ102N 80138	1	Handles have varies type available
2	Cylinder	SMZX	1	according to profile
3	Lock body	885	1	
4	Lock catch	SK03A	2	
5	Lock nail block	SC03A	2	
6	Ascending block	H20A	1	
7	Lock base	HK20	1	
8	Hinge	SH50	2	
9	Lock plate	SMK05B	1	



Configuration instructions:

- 1.Commonly used in the European standard 20 slot inward opening door.
- 2.Single door best size is 900mmx2200mm.
- 3.The load-bearing performance of the hinge is related to the size of the sash and the design of the profile.
- 4.Before install the hinge , put the hinge plate into the profile first.

Door hardware accessories--Hinge series

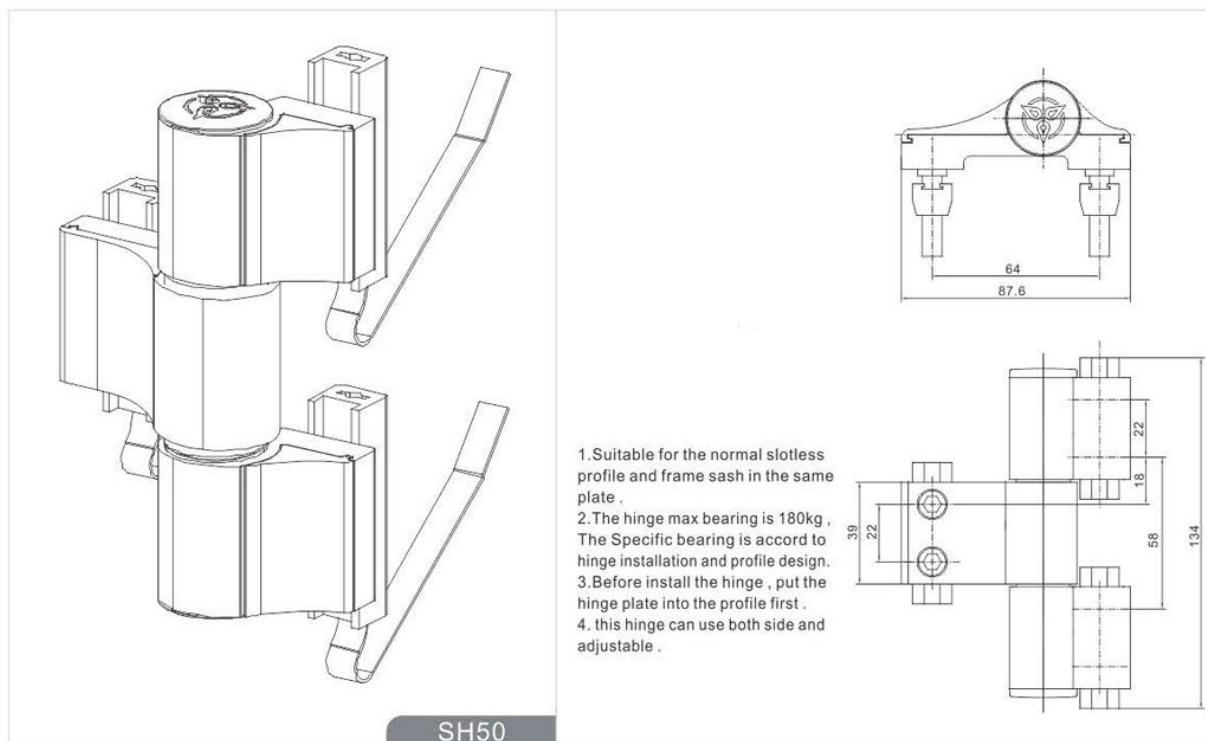

Lifting and sliding door system series

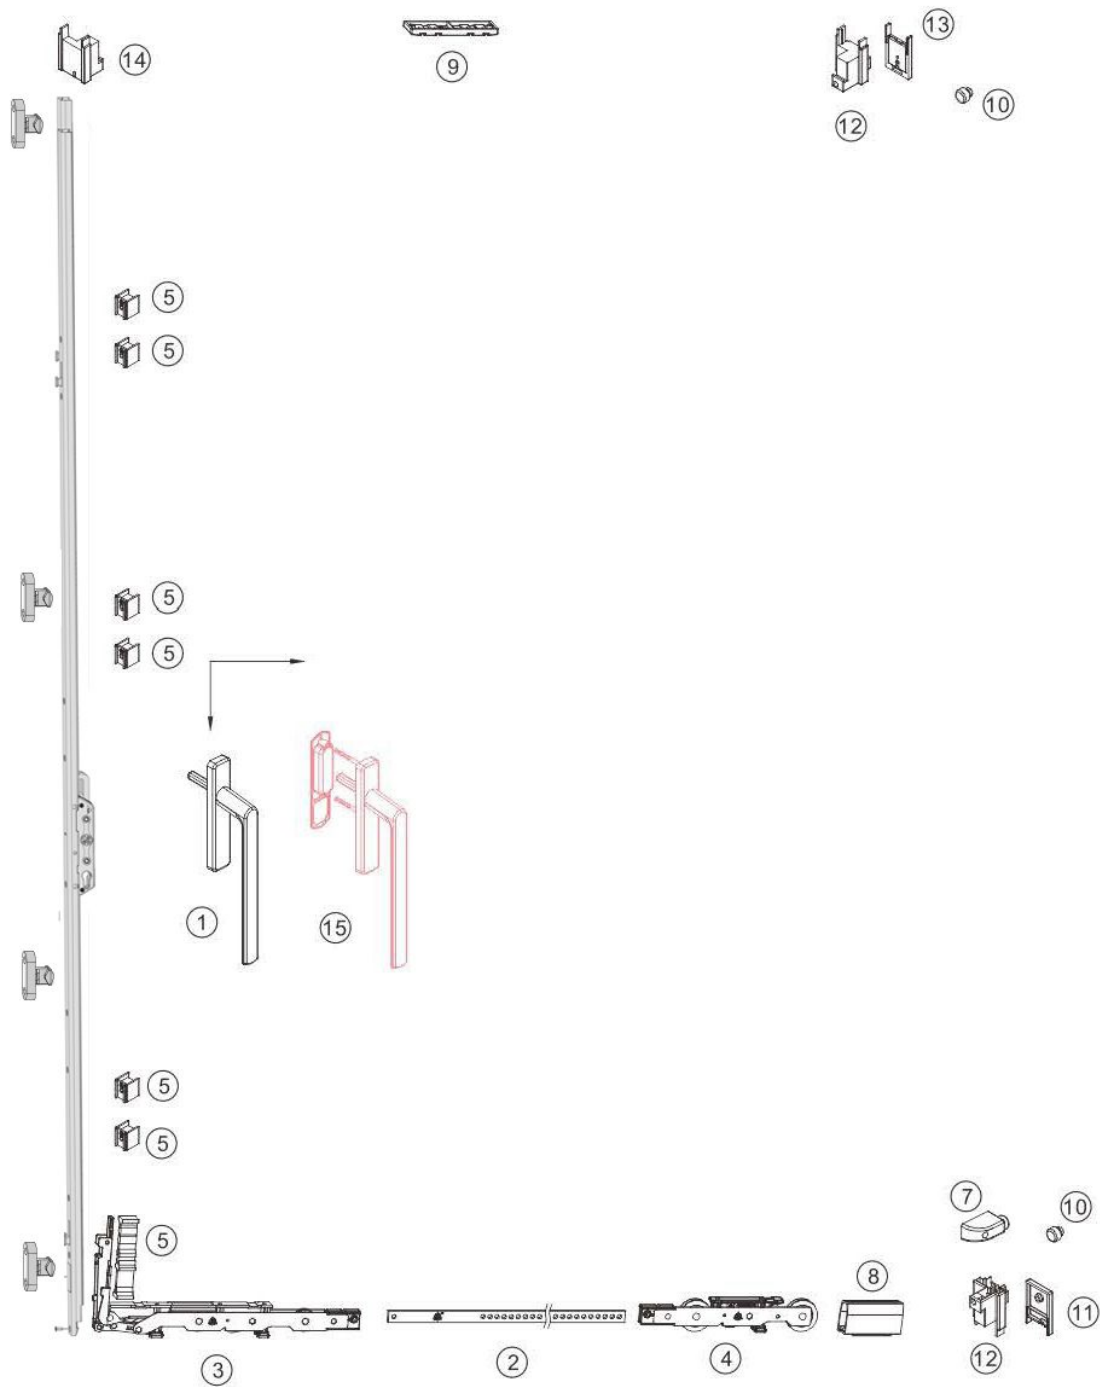

No.	Item Name	Code	Quantity	Mark
1	Handle	SFZ39	1	SFZ15
2	STSM05	STSM05	1	
	STSM05 Transmission rod	STSM02-03	1	
3	Front roller	STSM02-01	1	
4	Back roller	STSM02-02	1	
5	STSM05	STSM01-06	6	
	STSM05 Spare parts	STSM01-07	1	
6	Lock catch	STK30	3	
7	Buffer block	CF12	1	
8	permanent seat	STSM03-13	1	
9	Anti-theft block	STSM03-02	1	

Configuration instructions

Large bearing capacity

It can easily bear the door leaf with a weight of 250 kg; Active fan can choose accessories to achieve a load of 400 kg.

Good sealing effect

Since the door leaf has a distance of 7 mm for lifting / falling, the sealant strip can be designed to achieve the effect of sealing and sound insulation. The height of the lock point can be adjusted to better improve the density Sealing performance.

Flexible movement

Due to the ingenious lever principle, the opening / locking force is not affected by the weight of the door leaf itself, and the opening force is small; The transmission adopts gear structure to reduce force and increase buffering function, Greatly reduce the handle rebound and meet the comfortable handling performance;

High safety performance

The lock body on the transmission can be equipped with a lock cylinder (optional). According to the safety level of the lock cylinder, users can obtain different levels of safety;

The height of lock point can be adjusted by 10 mm

Any position positioning

The active fan can be moved to any position for positioning, which can not only realize local ventilation, but also ensure the safety of children and reduce the occurrence of accidents.

Super gate design


Realize the design of large fan opening, the height can reach 2800 mm, the width can reach 3300 mm, known as "movable wall".

Wide range of application

It is suitable for sunshine room, indoor partition, meeting room, shop and so on. It has special heat insulation, sound insulation and decoration effect.

surface treatment

The special electroplating process can prevent rust for a long time.

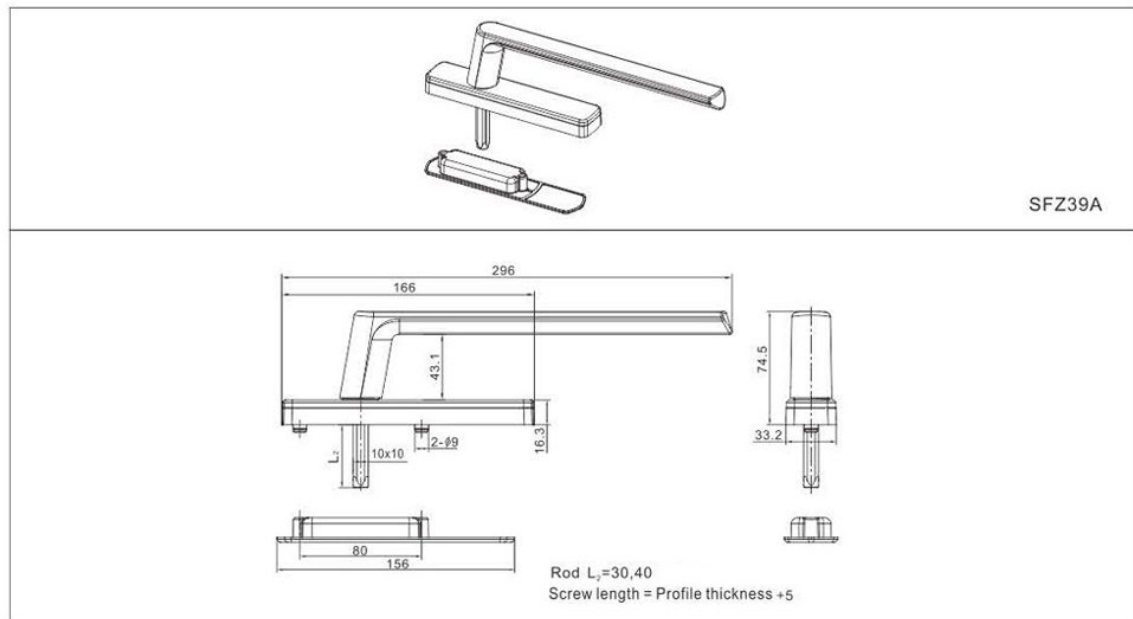




SH36



1. Suitable for European standard 20 slot profile.
2. The hinge max bearing is 55kg.
3. The Specific bearing is accord to hinge installation and profile design.
4. The slot for the hinge is 11.5mm.




SH32

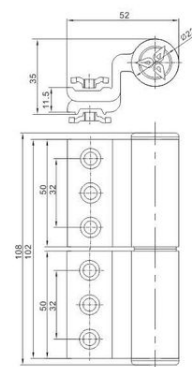

1. Suitable for European standard 20 slot profile.
2. The hinge max bearing is 90kg.
3. The Specific bearing is accord to hinge installation and profile design.
4. Before install the hinge, put the hinge plate into the profile first.




SH43

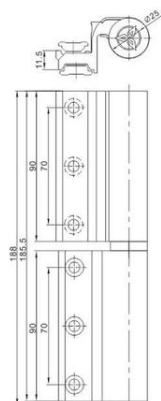

1. Suitable for European standard 20 slot profile.
2. The hinge max bearing is 180kg.
3. The Specific bearing is accord to hinge installation and profile design.
4. Before install the hinge, put the hinge plate into the profile first.
5. Increase the cover, can protect the surface.




SH55

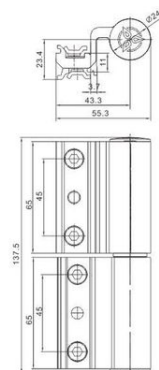

1. Suitable for European standard 20 slot profile.
2. The hinge max bearing is 150kg.
3. The Specific bearing is accord to hinge installation and profile design.
4. Before install the hinge, put the hinge plate into the profile first.



SH50

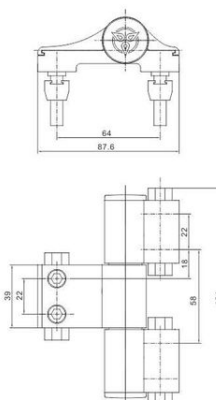


1. Suitable for the normal slotless profile and frame sash in the same plate.
2. The hinge max bearing is 180kg.
3. The Specific bearing is accord to hinge installation and profile design.
4. Before install the hinge, put the hinge plate into the profile first.
5. this hinge can use both side and adjustable.







SZ64B

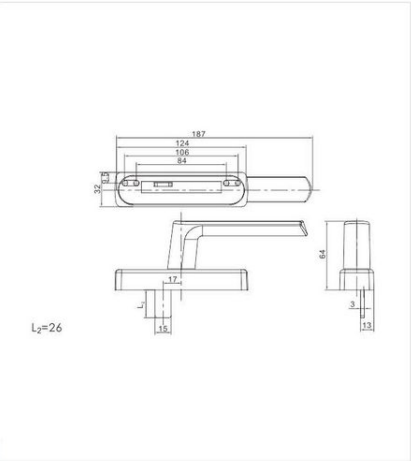


SFZ33

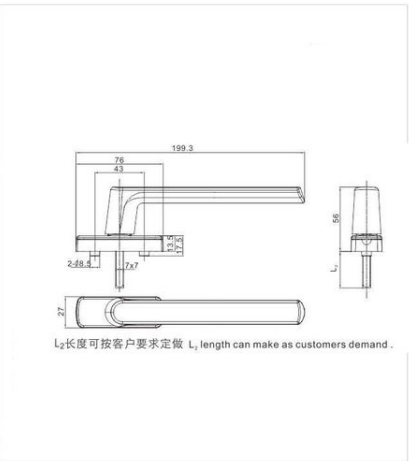


JSFZ19

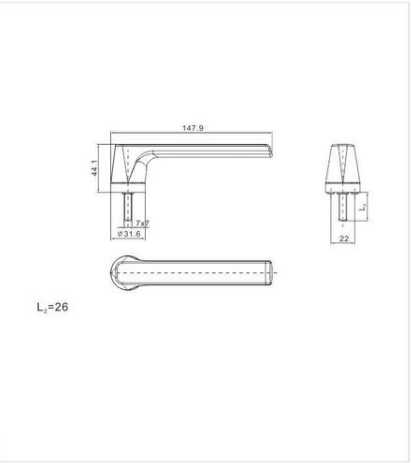


SNH18-11.5

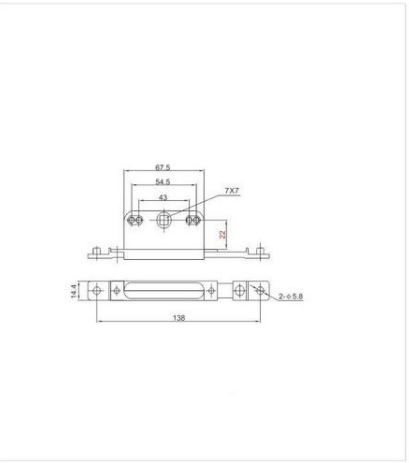


JSMZ06

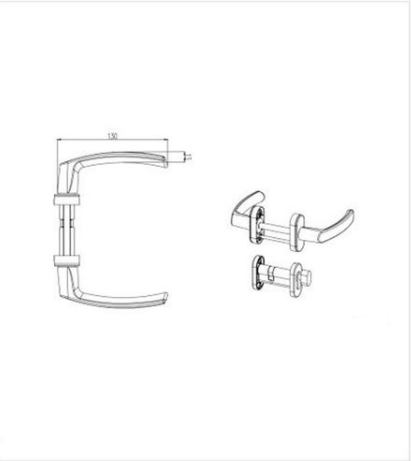

JSFZ39A

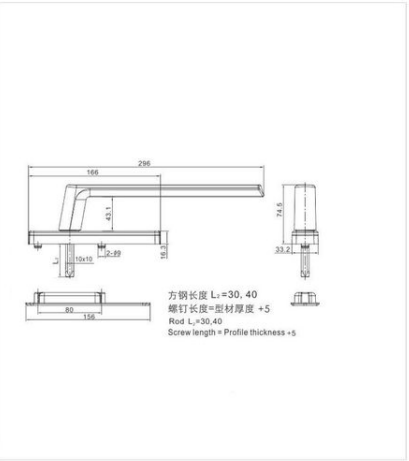

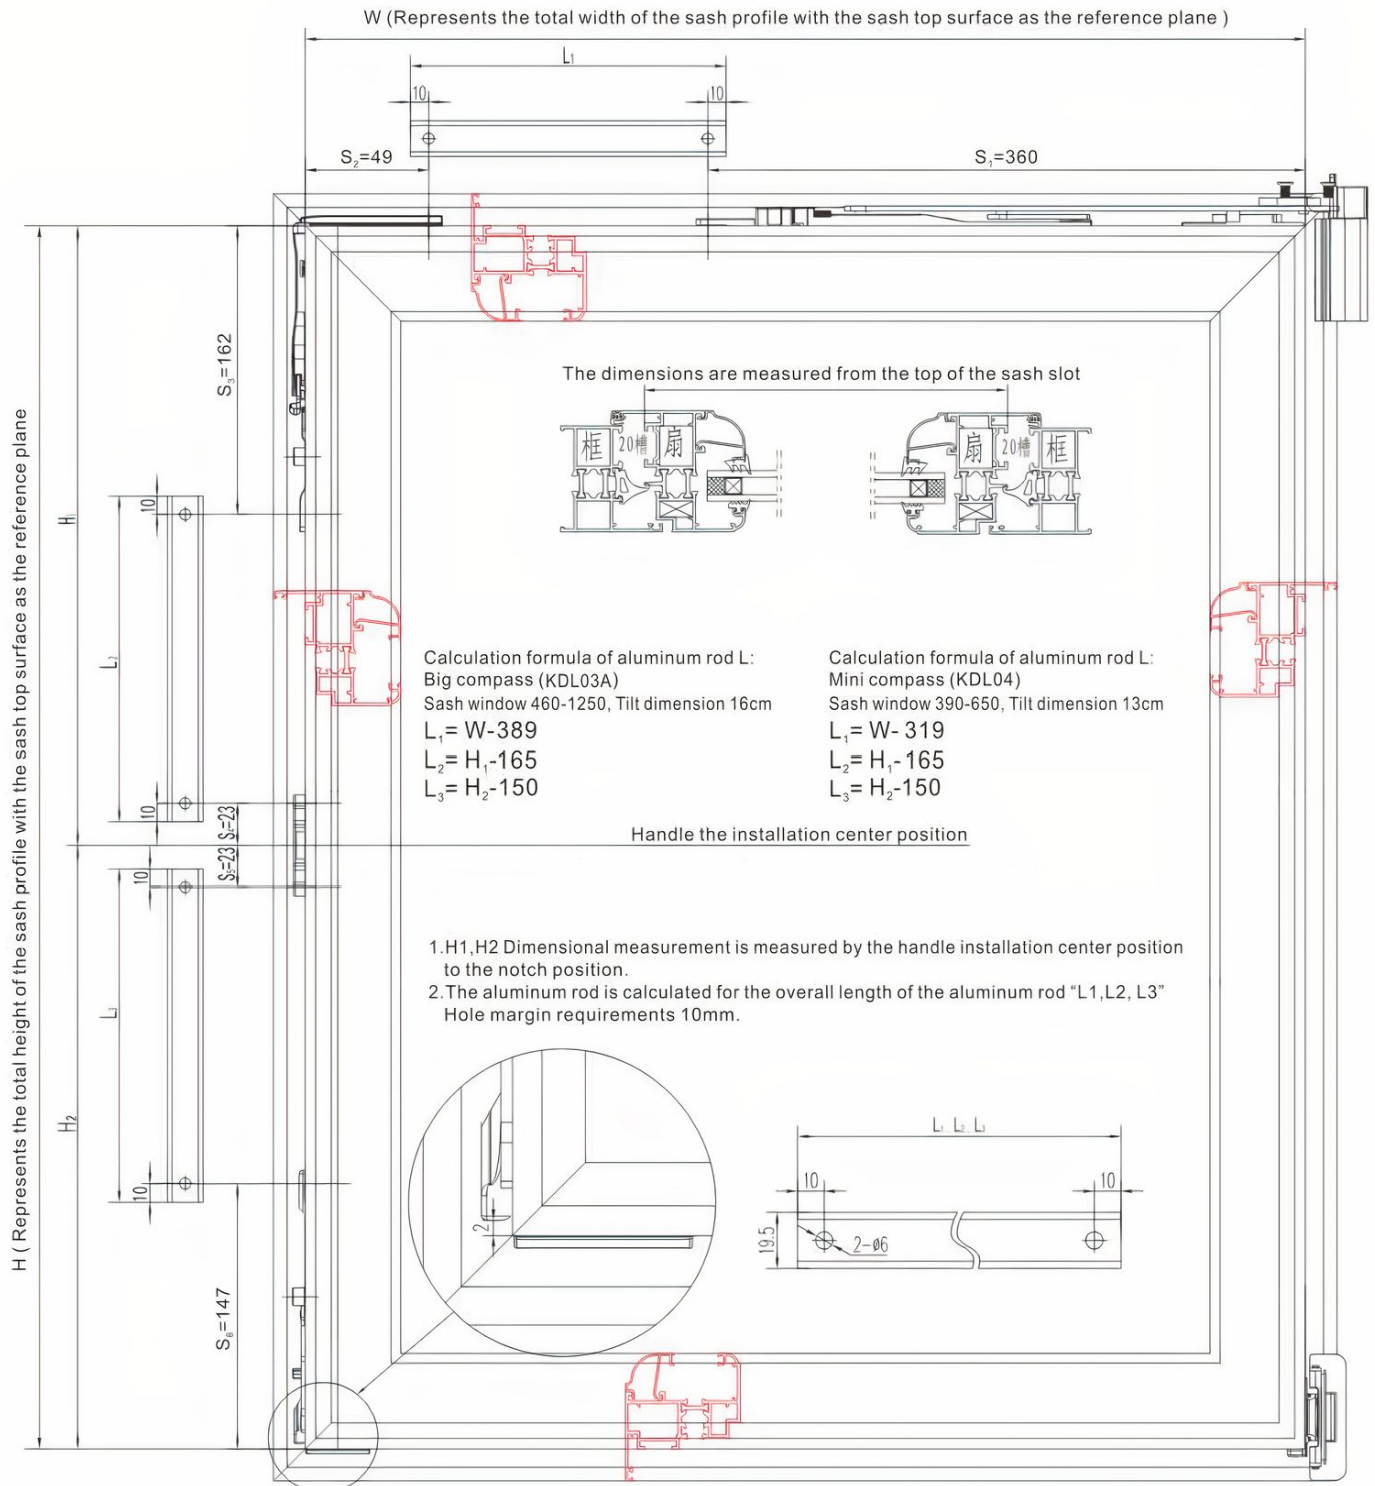

319- عرض بازشو

قیچی کوچک

389- عرض بازشو

قیچی بزرگ

